

CUP

MEMBRANE PER SCARICO RAPIDO TIPO CUP

Descrizione

Le membrane per scarico rapido tipo CUP sono utilizzate sulle valvole per aumentare la velocità di traslazione nei cilindri a semplice e doppio effetto e per depressurizzare velocemente nel caso di svuotamento di serbatoi o altro.

Limiti d'impiego

Pressione: da 0,5 a 10 [bar]
Temperatura: da -40°C a +90°C
Fluidi: aria secca o lubrificata (se lubrificata si consiglia olio ISO VG32).

Materiale

Materiale standard poliuretano a 90 Shore A.
Codice materiale standard: B0
Per impieghi superiori a 90°C il materiale utilizzato è poliuretano per alte temperature (135°C)
Codice materiale standard: G0

Montaggio

Il montaggio avviene in sede aperta.

CUP TYPE MEMBRANES FOR QUICK EXHAUST VALVES

Description

The membranes for quick exhaust valves are used on CUP type for faster travel speed, in single and double acting cylinder, and to depressurize quickly if you want to empty the tanks or otherwise.

Technical data

Pressure: from 0,5 to 10 [bar]
Temperature: from -40°C to +90°C
Fluids: dry or lubricated air (in case of lubricated is recommended to use oil ISO VG32).


Material


Standard polyurethane 90 Shore A.
Standard compound reference: B0
for applications above 90°C, the material used is polyurethane for high temperatures (135°C)
Code standard material: G0

Assembling

The assembly is in open groove.
It is recommended to lubricate with mineral grease.

CUP

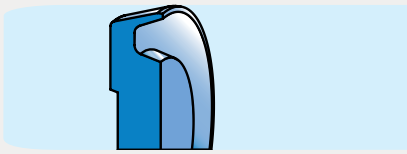

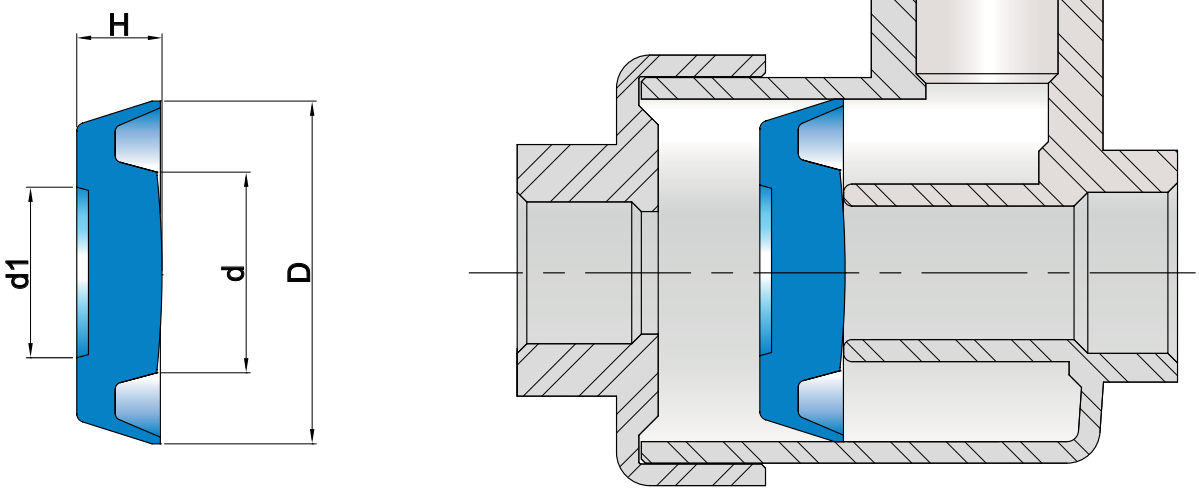

Rif.	D+0,5	H+0,3	d	d1	ART / *ITEM*
12	12,4	4,0	5,5	2	CUP 0120 Bo
1/8"	20,5	5,0	11,0	10,0	CUP 0200 Bo
1/4"-3/8"	25,6	5,5	15,0	10,0	CUP 0250 Bo
1/2"	35,8	7,9	20,0	14,0	CUP 0350 Bo
3/4"-1"	41,0	7,9	27,0	17,0	CUP 0400 Bo

Nota: altre dimensioni non a catalogo a richiesta. Consultare il nostro ufficio tecnico.

Remark: please contact our technical dept. for further dimensions not included in the catalogue.