

WIP

RASCHIATORE TIPO WIP

Descrizione

Il raschiatore tipo WIP si utilizza in condizioni di lavoro gravose, come cilindri per macchine movimento terra, per miniere e dove lo stelo supporta grosse flessioni. Le misure scelte sono per steli in pollici.

Dati tecnici

Velocità: ‹ 0,8 m/s
Temperatura: da – 40° C a + 90 ° C
Fluidi: agenti atmosferici, acqua a temperatura inferiore a 60° C, oli a base minerale
(v. tabella 3 a p. 14)

Materiale

I materiali utilizzati sono poliuretani con alto modulo elastico resistenti all'abrasione e agli agenti atmosferici. Il materiale standard è di durezza 90 Shore A.
In alternativa, in presenza di condizioni gravose in ambienti molto inquinati, sono utilizzabili poliuretani di durezza superiore. In questo caso consultare il nostro ufficio tecnico.
Codice materiale: Bo

Montaggio

Il montaggio, molto semplice, è in sede semiaperta. Eliminare bave e spigoli taglienti nella sede per non danneggiare la tenuta.
Per ulteriori informazioni leggere le istruzioni a p. 63.

WIP TYPE WIPER

Description

The wiper type WIP applies when the conditions of application can be burden some, type cylinders for earthmoving machinery, mining cylinders, cylinders where the rod supports large deflections.
The measurement stem from in inch sizes.

Technical data

Speed: *‹ 0.8 m/s*
Temperature: *from – 40° C to + 90 ° C*
Fluids: *atmospheric factors, water at a temperature below 60° C, mineral oils (see table 3, page 14)*


Material


The proposed material is a "Co" type polyurethane, with high elasticity modulus, low compression-set and high abrasion resistance.
The hardness is 90 Shore A ± 2.
Compound reference: Bo
It is also possible to use harder polyurethanes for heavy polluted environments.
In case please contact our technical department.

Assembling

The assembling is extremely easy because of the semi-open groove.
Remove flashes an/or cutting edges in the housing.
For further information please refer to the installation instructions on page 63.

WIP

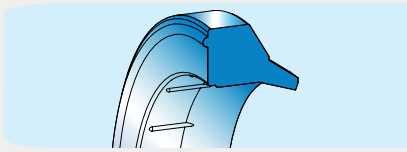

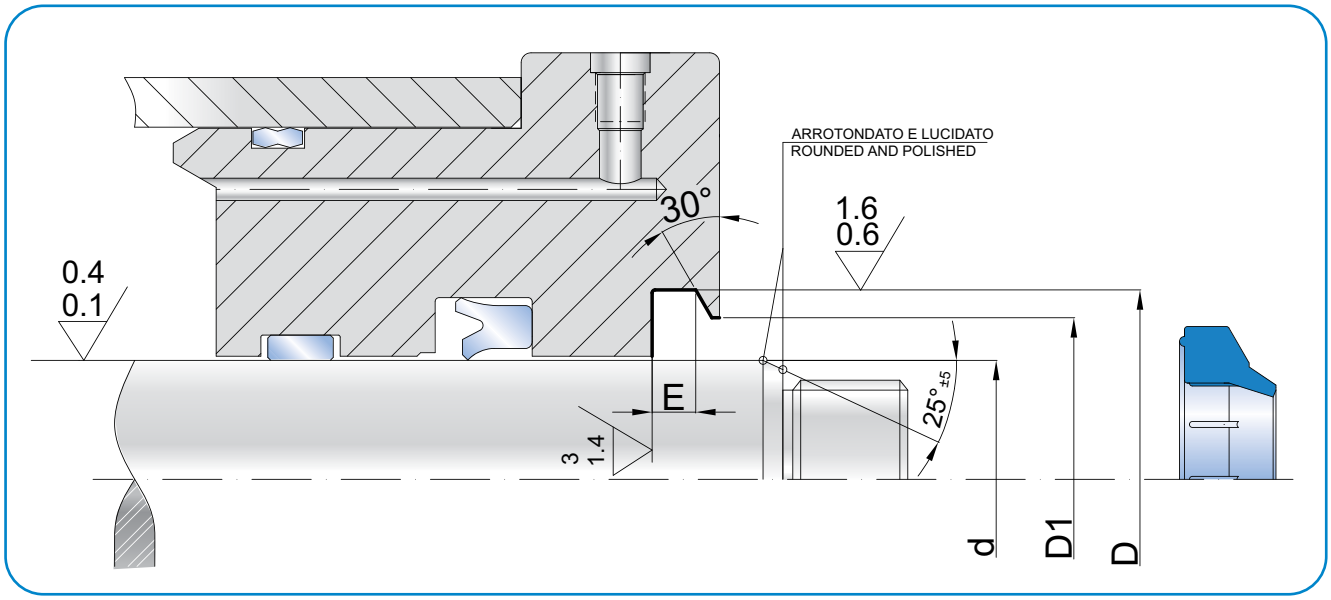

d_{h9}	D_{H10}	E +0,2	D_1 0/+0,2	ART / *ITEM*			
19,05	31,75	5,30	25,45	WIP	0750	1250	Bo
20,00	32,70	5,30	26,40	WIP	0780	1280	Bo
24,90	37,60	5,30	26,40	WIP	0980	1480	Bo
25,40	38,10	5,30	31,80	WIP	1000	1500	Bo
28,57	41,27	5,30	34,97	WIP	1125	1625	Bo
30,00	42,70	5,30	36,40	WIP	1180	1680	Bo
31,75	44,45	5,30	38,15	WIP	1250	1750	Bo
33,00	45,70	5,30	39,40	WIP	1290	1790	Bo
38,10	50,80	5,30	44,10	WIP	1500	2000	Bo
40,00	52,70	5,30	46,40	WIP	1575	2075	Bo
44,45	57,15	5,30	50,85	WIP	1750	2250	Bo
45,00	57,70	5,30	51,40	WIP	1770	2270	Bo
47,62	60,32	5,30	54,02	WIP	1875	2375	Bo
50,00	62,70	5,30	46,40	WIP	1970	2470	Bo
50,80	63,50	5,30	57,20	WIP	2000	2500	Bo
53,97	66,67	5,30	60,37	WIP	2125	2625	Bo
56,00	68,70	5,30	62,40	WIP	2200	2700	Bo
57,15	69,85	5,30	63,55	WIP	2250	2750	Bo

d_{h9}	D_{H10}	E +0,2	D_1 0/+0,2	ART / *ITEM*			
60,00	72,70	5,30	66,40	WIP	2360	2860	Bo
63,00	75,70	5,30	69,40	WIP	2480	2980	Bo
63,50	76,20	5,30	69,90	WIP	2500	3000	Bo
65,00	77,70	5,30	71,40	WIP	2550	3050	Bo
70,00	82,70	5,30	76,40	WIP	2750	3250	Bo
76,20	88,90	5,30	82,40	WIP	3000	3500	Bo
80,00	92,70	5,30	86,40	WIP	3150	3650	Bo
82,55	95,25	5,30	88,95	WIP	3250	3750	Bo
85,00	97,70	5,30	91,40	WIP	3340	3840	Bo
88,00	100,70	5,30	94,40	WIP	3460	3960	Bo
95,00	107,70	5,30	101,40	WIP	3740	4240	Bo
100,00	112,70	5,30	106,40	WIP	3930	4430	Bo
107,95	120,65	5,30	114,35	WIP	4250	4750	Bo
110,00	122,70	5,30	116,40	WIP	4330	4830	Bo