

RAA

ANELLI ANTIETRUZIONE TIPO RAA

Descrizione

Gli anelli antiestrusione sono utilizzati a supporto della guarnizione, dove il gioco di accoppiamento tra la testata e lo stelo risulta ampio e le pressioni di esercizio molto elevate (superiore a 250 bar).

Dati Tecnici

Pressione: ‹ 600 bar
Velocità: ‹ 1 m/s
Temperatura: da - 30° C a + 100° C
Fluidi: fluidi e oli minerali
(v. tabella 3 a p. 14)

Materiale

Il materiale standard è resina acetalica POM
Codice materiale: R2

Montaggio

Il montaggio può avvenire in sede anulare con anello tagliato o anello intero.

RAA TYPE ANTIEXTRUSION RING

Description

The anti-extrusion rings are used to support the gasket, where the coupling clearance between the cylinder head and the stem is wide and the operating pressures are very high (over 250 bar).

Technical data

Pressure: ‹ 600 bar
Speed: ‹ 1 m/s
Temperature: from - 30° C up to + 100° C
Fluid: mineral fluids and oils
(see table 3, page 14)


Material


Standard material is acetalic resin POM
Compound reference: R2

Assembling

Assembling can be in the annular groove ring with cut or whole ring.

RAA

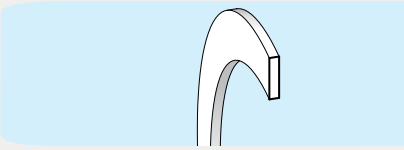

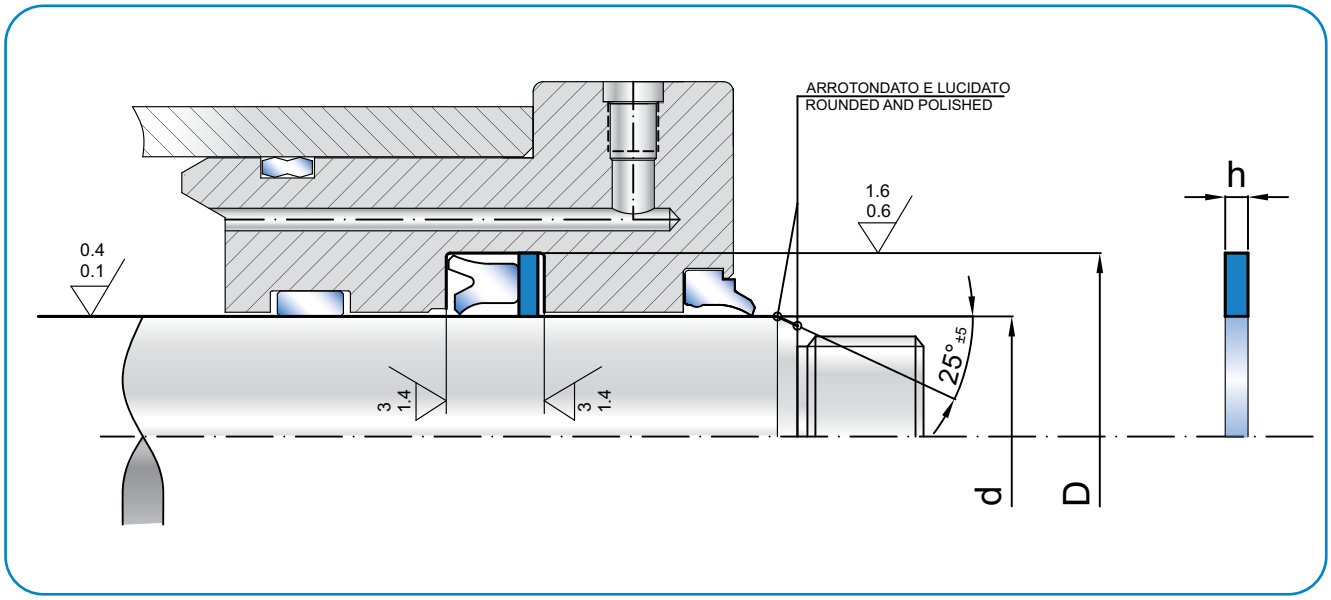

d_{h9}	D_{H10}	h	ART / *ITEM*
16,00	24,00	1,00	RAA 0160 0240 010 R2
28,00	36,00	1,50	RAA 0280 0360 015 R2
30,00	38,00	1,50	RAA 0300 0380 015 R2
30,0	40,0	2,00	RAA 0300 0400 020 R2
30,0	40,0	2,50	RAA 0300 0400 025 R2
30,80	37,00	1,40	RAA 0308 0370 014 R2
32,00	39,00	1,50	RAA 0320 0390 015 R2
32,00	40,00	1,50	RAA 0320 0400 015 R2
35,00	43,00	1,50	RAA 0350 0430 015 R2
35,00	44,00	1,50	RAA 0350 0440 015 R2
35,00	45,00	1,50	RAA 0350 0450 015 R2
36,00	47,30	1,50	RAA 0360 0473 015 R2
37,40	48,00	3,00	RAA 0374 0480 030 R2
38,00	46,00	1,50	RAA 0380 0460 015 R2
40,00	48,00	1,40	RAA 0400 0480 014 R2
40,00	50,00	2,00	RAA 0400 0500 020 R2
40,00	50,00	1,50	RAA 0400 0500 015 R2
42,00	52,00	1,50	RAA 0420 0520 015 R2
42,00	52,00	1,50	RAA 0420 0520 015 R2
45,00	53,00	1,50	RAA 0450 0530 015 R2
45,00	55,00	1,50	RAA 0450 0550 015 R2
45,00	55,00	2,00	RAA 0450 0550 020 R2
45,20	51,40	1,40	RAA 0452 0514 014 R2
50,00	58,00	1,50	RAA 0500 0580 015 R2

d_{h9}	D_{H10}	h	ART / *ITEM*
50,00	59,00	1,50	RAA 0500 0590 015 R2
50,00	60,00	1,20	RAA 0500 0600 012 R2
50,00	60,00	1,50	RAA 0500 0600 015 R2
53,00	63,00	2,00	RAA 0530 0630 020 R2
56,00	66,00	1,50	RAA 0560 0660 015 R2
60,00	70,00	1,50	RAA 0600 0700 015 R2
60,00	75,00	1,50	RAA 0600 0750 015 R2
63,00	67,80	3,00	RAA 0630 0678 030 R2
63,00	82,00	1,50	RAA 0630 0820 015 R2
65,00	75,00	1,50	RAA 0650 0750 015 R2
65,00	77,00	1,50	RAA 0650 0770 015 R2
70,00	80,00	1,50	RAA 0700 0800 015 R2
70,00	80,00	2,00	RAA 0700 0800 020 R2
75,00	85,00	1,50	RAA 0750 0850 015 R2
75,00	90,00	1,50	RAA 0750 0900 015 R2
80,00	90,00	1,50	RAA 0800 0900 015 R2
83,00	93,00	1,50	RAA 0830 0930 015 R2
90,00	100,0	3,00	RAA 0900 1000 030 R2
90,00	105,00	1,50	RAA 0900 1050 015 R2
100,00	110,00	3,00	RAA 1000 1100 030 R2
100,00	115,00	1,50	RAA 1000 1150 015 R2

Nota: altre dimensioni non a catalogo a richiesta. Consultare il nostro ufficio tecnico.

Remark: please contact our technical dept. for further dimensions not included in the catalogue.